

中正数控

CNC Zhongzheng

CNC Zhongzheng



中正数控

ZHONGZHENG CNC

ZHONGZHENG CNC

20 YEARS MANUFACTURING EXPERIENCE

10+ YEARS EXPORT EXPERIENCE



Nanshahe Town Industrial Park, Tengzhou
City, Shandong Province

枣庄中正数控机床 ZHONGZHENG CNC



Company Profile

Zaozhuang Zhongzheng CNC Co., Ltd.

The company mainly produces integrated spray painting and plating machines, PVC laminating machines, film laminating machines, industrial adhesives, shadowless adhesives, and industrial tempered glass film. The equipment is primarily used in the advertising industry for laminating tempered glass film onto PVC sheets and processing miniature lettering and spray-painted lettering.



<u>Part 1</u> ·Fully automatic paint spraying and plating integrated machine	4-9
<u>Part2</u> ·Fully automatic laminating and bonding machine	10
<u>Part 3</u> ·Fully automatic laminating machine	11
<u>Part 4</u> ·Tempered glass screen protector, adhesive, and other consumables	14

中正数控
CNC Zhongzheng

PROFESSIONAL MANUFACTURER OF AUTOMATIC PAINTING EQUIPMENT

High Efficiency • Precise Control • Stable Performance • Easy Operation



AUTOMATIC
SPRAYING

PRECISE
CONTROL

STABLE
PERFORMANCE

EASY
OPERATION

YOUR TRUSTED PARTNER
FOR SURFACE FINISHING SOLUTIONS



HIGH QUALITY
COMPONENTS

Ensuring long-term
reliability



CUSTOMIZED
SOLUTIONS

Meeting different
production needs



24/7 SERVICE
SUPPORT

Professional team
ready to help

Zhongzheng reciprocating baking paint machine PT-800

1600mm*1500mm*1700mm



功能 Functionality	烤箱 oven
喷漆, 烤漆 Painting, baking the paint	5层 800*800mm 5layer 800*800mm
排污方式 method of discharge	清洗系统 scavenger system
水帘, 上压风加风机滤芯过滤 Water curtain, with air pressure and fan filter core for filtration	管路, 喷枪自动清洗 Automatic cleaning of spray guns and pipelines
漆壶 pottery kettle	喷漆方式 spray painting method
3个 2L 漆壶 1个可拆卸式(500ml) Three 2-liter paint cans and one detachable (500ml) one.	往复喷漆四个面, 下方自动旋转 Reciprocating sprays four sides, rotates automatically from below
使用电压 service voltage	设备总功率 Total power of the device
220V	6千瓦 6 kilowatts
外径尺寸 Outer diameter	工作尺寸 Working size
1600mm*1500mm*1700mm	800mm*800mm
喷枪 airbrush	产品范围 Product range
3把高雾化喷枪 3 high atomizing spray guns	亚克力, PVC, 迷你字, 精工字, 金属制品, 塑料制品, 木制品, 工艺品等 Acrylic, PVC, mini letters, precision letters, metal products, plastic products, wood products, handicrafts, etc.
工位 station	
双工位, 一个自动, 一个手动。 Two workstations: one automatic, one manual.	

Zhongzheng reciprocating baking paint machine PT-1200

2200mm*2000mm*1900mm



功能 Functionality	烤箱 oven
喷漆, 烤漆 Painting, baking the paint	4层 1200*1200mm 4layer 1200*1200mm
排污方式 method of discharge	清洗系统 scavenger system
水帘, 上压风加风机滤芯过滤 Water curtain, with air pressure and fan filter core for filtration	管路, 喷枪自动清洗 Automatic cleaning of spray guns and pipelines
漆壶 pottery kettle	喷漆方式 spray painting method
3个 2L 漆壶 1个可拆卸式(500ml) Three 2-liter paint cans and one detachable (500ml) one.	往复式喷涂四个面, 下方自动旋转 Reciprocating sprays four sides, rotates automatically from below
使用电压 service voltage	设备总功率 Total power of the device
220V	8.5 千瓦 8.5 kilowatts
外径尺寸 Outer diameter	工作尺寸 Working size
2200mm*2000mm*1900mm	1200mm*1200mm
喷枪 airbrush	产品范围 Product range
3把高雾化喷枪 3 high atomizing spray guns	亚克力, PVC, 迷你字, 精工字, 金属制品, 塑料制品, 木制品, 工艺品等 Acrylic, PVC, mini letters, precision letters, metal products, plastic products, wood products, handicrafts, etc.
工位 station	
双工位, 一个自动, 一个手动。 Two workstations: one automatic, one manual.	

Zhongzheng reciprocating baking paint machine PT-2440

3600mm*2200mm*2150mm



中正数控

Zhongzheng Computerized Numerical Control

功能 Functionality

喷漆, 烤漆
Painting, baking the paint

排污方式 method of discharge

水帘, 上压风加风机滤芯过滤
Water curtain, with air pressure and fan filter core for filtration

漆壶 pottery kettle

3个 2L 漆壶 1个可拆卸式(500ml)
Three 2-liter paint cans and one detachable (500ml) one.

使用电压 service voltage

220V

外径尺寸 Outer diameter

3600mm*2200mm*2150mm

喷枪 airbrush

3把高雾化喷枪
3 high atomizing spray guns

工位 station

双工位, 一个自动, 一个手动。
Two workstations: one automatic, one manual.

烤箱 oven

5层 1200*1200mm
5 layer 1200*1200mm

清洗系统 scavenger system

管路, 喷枪自动清洗
Automatic cleaning of spray guns and pipelines

喷漆方式 spray painting method

往复式喷涂四个面, 下方自动旋转
Reciprocating sprays four sides, rotates automatically from below

设备总功率 Total power of the device

8.5 千瓦 8.5 kilowatts

工作尺寸 Working size

1220mm*2440mm




产品范围 Product range

亚克力, PVC, 迷你字, 精工字, 金属制品, 塑料制品, 木制品, 工艺品等
Acrylic, PVC, mini letters, precision letters, metal products, plastic products, wood products, handicrafts, etc.

Main applications: Processing acrylic, PVC, miniature letters, precision letters, metal products, plastic products, wood products, and handicrafts.




中正数控
ZHONGZHENG CNC

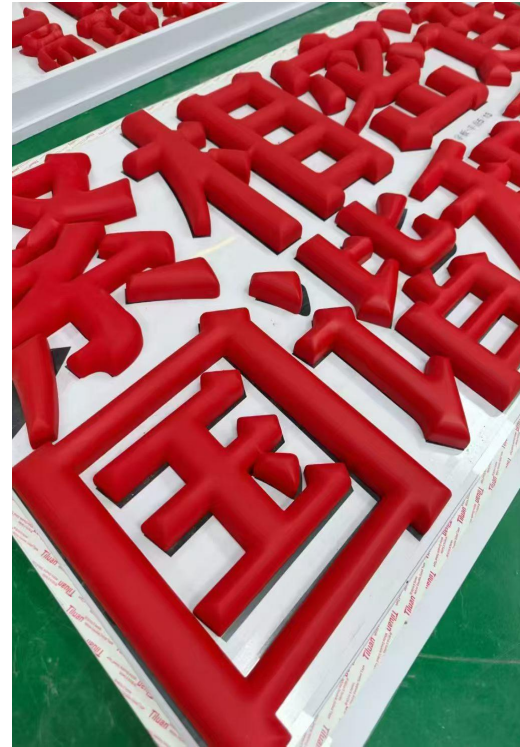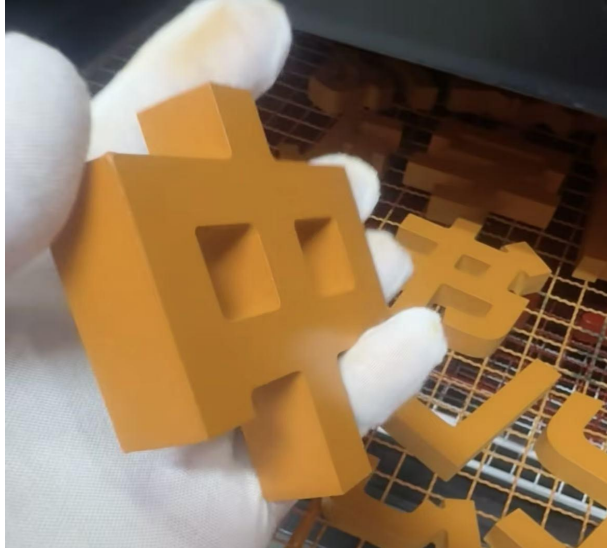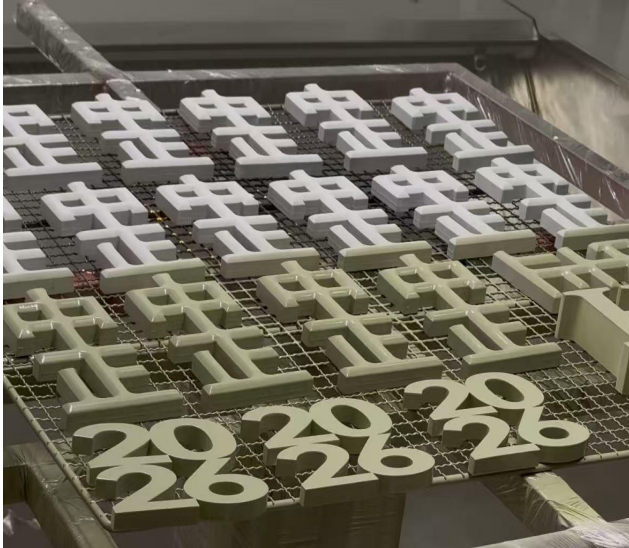



中正数控
ZHONGZHENG CNC

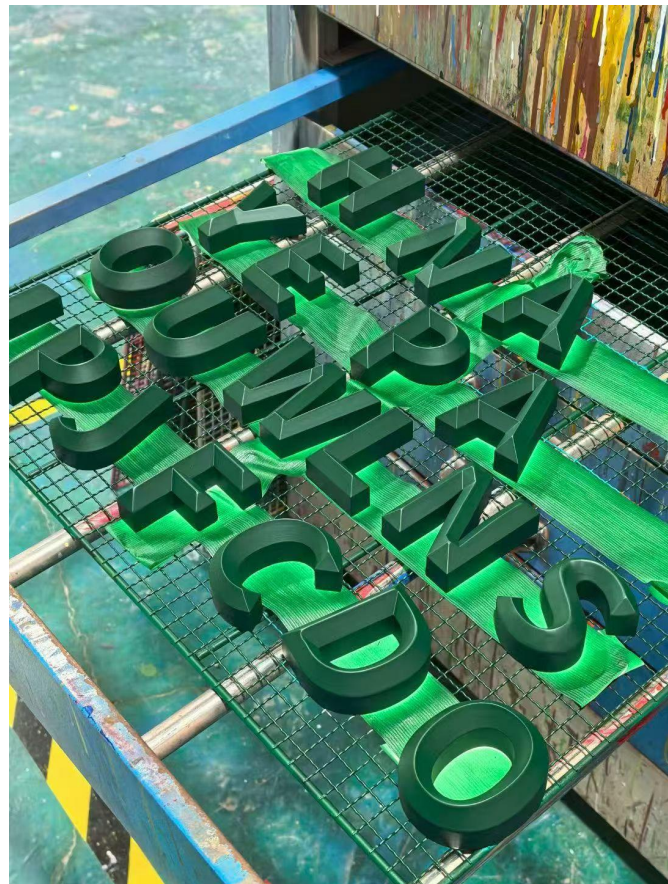

High-end Zhongzheng coiled roll-coating wafer machine

Dimensions: 5.7 × 2.3 × 1.8 meters; two feeding racks, each 1.5 meters long; main unit: 1.7 meters.



Model型号	PET-E5
operating speed工作速度	2 meters per minute 一分钟2米。
Total floor space dimensions of the unit整机占地尺寸	Dimensions: 5.7 × 2.3 × 1.8 meters; two feeding racks, each 1.5 meters long; main unit: 1.7 meters. 5.7*2.3*1.8米，上料架1.5米*2个，主机1.7米。
working area 工作面积	7.7 meters * 2.3 meters 7.7米*2.3米
operative mode 操作方式	Display operation: automatic lifting 显示屏操作，自动升降
Total power 总功率	7 kilowatts 7千瓦
input voltage 输入电压	220V
Atmospheric pressure 气压	3-4 pressure 3-4压
operational altitude, operational height 工作高度	10cm
Total weight of the machine 整机重量	1.6T
Control Case 控制机箱	Built-in chassis 内置机箱
driving mode, drive style, kind of drive 传动方式	The entire machine is equipped with 6 motors. 整机6个电机，
Controller 控制器	PLC Touchscreen Controller PLC 触摸屏控制器
Curing light 固化灯	LED cold light curing lamp, 1000 W LED 灯冷光源固化灯 1000w
Function 功能	Widely used for PET film application 广泛用于 PET 贴膜
job step 工作步骤	Glue application, film pressing, curing 涂胶，膜压，固化

High-end Medium-Neutral Coated Crystal Sheet Machine with Roller Coating Technology

4.7*2.3*1.8 meters. Feeding racks: 1.5 meters each, 2 in total. Main unit: 1.7 meters.



工作速度 Work speed	一分钟 2 米。 2 meters per minute.
整机占地尺寸 Overall machine footprint	4.7*2.3*1.8 米 , 上料架 1.5 米*2 个, 主机 1.7 米。 4.7*2.3*1.8meters. Feeding racks: 1.5 meters each, 2 in total. Main unit: 1.7 meters.
工作面积 working area	6.7 米*2.3 米 6.7 meters * 2.3 meters
操作方式 Operation Method	显示屏操作, 自动升降 Display screen operation, automatic lifting and lowering
总功率 Total power	7 千瓦 7 kilowatts
输入电压 Input Voltage	220V
气压 atmospheric pressure	3—4 压 3—4 Press
工作高度 Working height	10cm
整机重量 Overall weight of the machine	1.6T
控制机箱 Control chassis	内置机箱 Built-in chassis
传动方式 Transmission method	整机 5 个电机 5 motors in total
控制器 Controller	PLC 触摸屏控制器 PLC Touch Screen Controller
固化灯 Curing lamp	LED 灯冷光源固化灯 1000w LED Cold Light Curing Lamp 1000w
功能 Function	广泛用于各种板材 PET 贴膜 Widely used for PET film lamination on various panels
工作步骤 Work Steps	涂胶, 膜压, 固化 Gluing, film pressing, curing

The equipment is widely used for bonding film sheets onto various substrates, including steel sheets, tempered glass, acrylic sheets, organic boards, and transparent sheets, as well as for manufacturing acrylic-coated PVC panels. It features an automatic acrylic feeding system and precision alignment mechanism, ensuring accurate positioning, high speed, and zero glue spillage.






中正数控
ZHONGZHENG CNC



Tempered glass screen protector, adhesive, and other consumables

Main applications: lightbox panels, shop window advertisements, outdoor billboards, elevator advertising columns, UV screen coating, explosion-proof, scratch-proof, high-definition, sun-resistant, and fade-resistant.

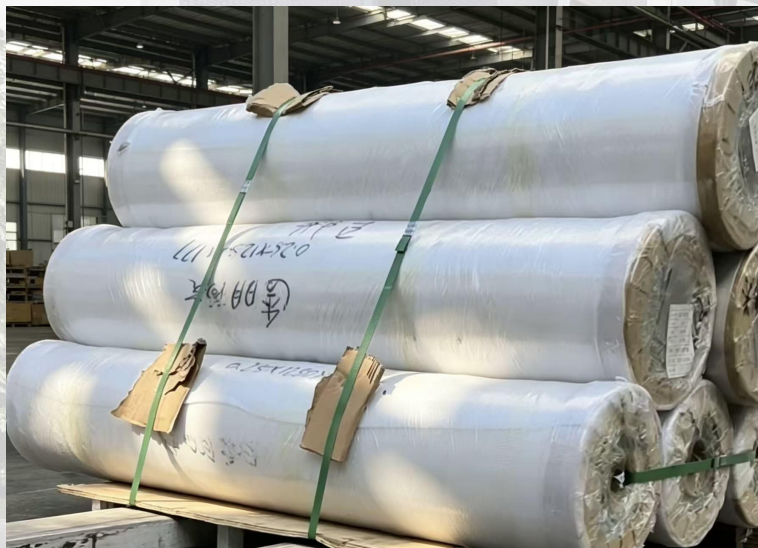

Main applications: bonding illuminated/acrylic letters, lightbox assembly, mounting KT foam board paintings, glass and metal wall bonding, and outdoor advertising reinforcement and sealing.



中正数控
ZHONGZHENG CNC